



## OPW 45 Hose Swivel


The OPW 45 swivel is designed for gasoline self-service applications where easy nozzle and hose handling is important for customer convenience. The 45 is installed between the nozzle and hose to reduce strain, providing flexibility so fueling hoses last longer.

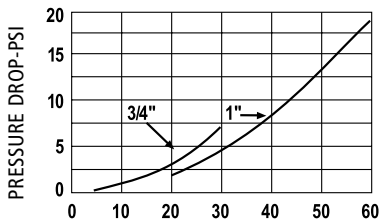

FLOW RATE-GPM (STODDARD SOLVENT)

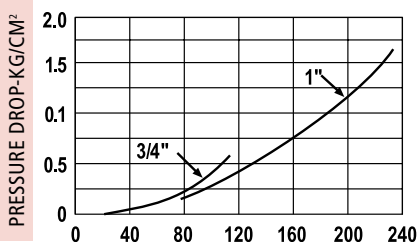


FLOW RATE-L/MIN. (STODDARD SOLVENT)

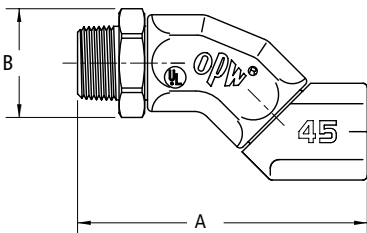

## OPW 36S Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 36S provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

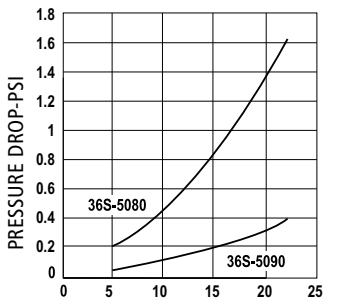

FLOW RATE-GPM (STODDARD SOLVENT)

## Materials

**Body:** Aluminum  
**Outlet Adaptor:** Zinc  
**Inlet Adaptor:** Zinc  
**Seals:** Buna-N  
**Weight:** 3/4": .65 lbs. each; 30 kg  
 1": 1.16 lbs. each; .53 kg



OPW 45

## Features

- ◆ UL and ULC listed for use in gasoline, diesel, and up to 10% ethanol blends. Specific listings available at [www.opwglobal.com](http://www.opwglobal.com).
- ◆ Compact, attractive profile for a sleek, modern appearance.
- ◆ Secure design not repairable or rebuildable for certainty of operation. Every OPW 45 is factory assembled and tested.
- ◆ Better flow performance less restriction means higher refueling speeds.
- ◆ Unique 2 planes of rotation for easy nozzle positioning and hose life.
- ◆ 50 psi (3.45 bar) maximum pressure.

## Ordering Specifications

| Product # | Size                  | Overall Length |         | Weight |     |
|-----------|-----------------------|----------------|---------|--------|-----|
|           |                       | A              | B       | lbs.   | kg  |
| 45-5060   | 3/4" F x 3/4" M (NPT) | 4 1/8"         | 1 9/16" | .65    | .30 |
|           | 19 mm x 19 mm         | 105 mm         | 40 mm   |        |     |
| 45-5075   | 1" F x 1" M (NPT)     | 4 3/4"         | 1 7/8"  | 1.16   | .53 |
|           | 25 mm x 25 mm         | 121 mm         | 48 mm   |        |     |

## Materials

**Body:** Aluminum  
**Adaptor:** Zinc  
 Aluminum  
**Seals:** Buna-N O-Ring,  
 Viton® O-Ring  
**Bearings:** Nylon



36S-5080

## Ordering Specifications

| Product Number | Inlet Thread x Outlet Thread | lbs. | kg   |
|----------------|------------------------------|------|------|
| 36S-5080       | 3/4" M x 3/4" F (NPT)        | 0.30 | 0.14 |
|                | (19 mm x 19 mm)              |      |      |
| 36S-5090       | 1" M x 1" F (NPT)            | 0.40 | 0.18 |
|                | (25 mm x 25 mm)              |      |      |

## Listings and Certifications



NOTE: See OPW's Website at [www.opwglobal.com](http://www.opwglobal.com) for product instruction sheets, trouble-shooting guides, how-to-use guide and to view the Do's & Don'ts at the Gas Pump video.